
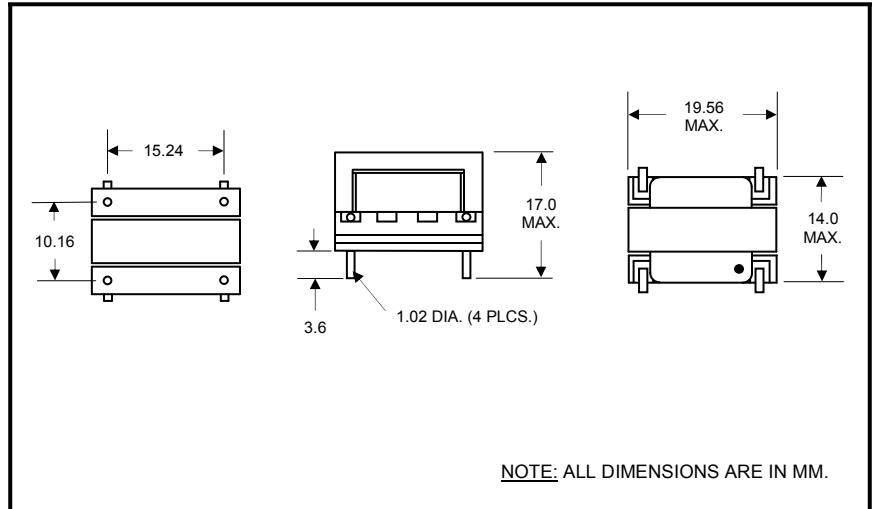


PA800XFMR

Audio Transformer

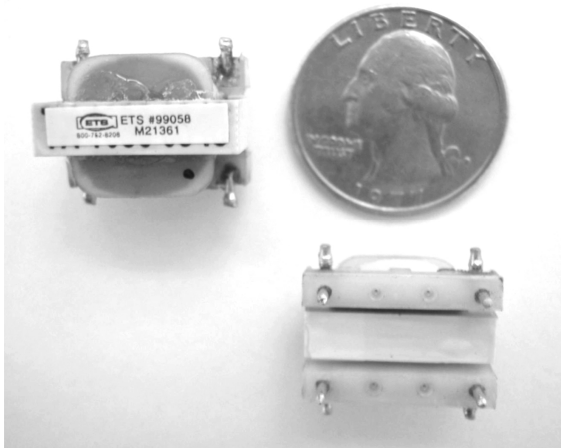

Features/Advantages	Description	Applications
<ul style="list-style-type: none"> • Full audio bandwidth • Minimizes spurious signal ingress 	<p>The ETS Audio Transformer is ideal for use in applications sending line-level audio signals. Note that signals may be sent in either direction.</p> <p>By balancing the audio signal as well as isolating it, signals can be dependably sent over 100 meters.</p>	<ul style="list-style-type: none"> • Home Theater Systems • Auditoriums • Churches • Schools & Classrooms • Healthcare Facilities • Concert Venues

Specifications		Product Ordering Information	
Bandwidth	10 Hz to 20 kHz	PA800XFMR	Audio Transformer
Impedance	600 ohm		
Longitudinal Balance	60dB Min. from 200 Hz to 1 KHz		
	40dB Min. from 1 KHz to 4 KHz		
Return Loss	15dB Min. from 300 Hz to 3 KHz		
Isolation	500 V		
Net Weight	0.01 kg		

© Copyright 2004-2014 Energy Transformation Systems
 FatCat5 System panels and information outlets protected under US Patent Number 6,123,577. FatCat5™, FatCat5 System™, Chameleon Color Coding System™, Balanced Star™, Balanced Line™, Monoline™ and Precision Wave™, InstaSnake™, CineSnake™ are trademarks of Energy Transformation Systems. All other brand or product names are or may be trademarks of, and are used to identify the products or services of their respective owners.
 Revised 02/03/2014



Energy Transformation Systems, Inc.
 43353 B Osgood Road, Fremont, CA 94539
www.etslan.com
 800-752-8208 510-656-2012 Fax 510-656-2026

