


# SDS900 Series



# Audio Products - Adapters

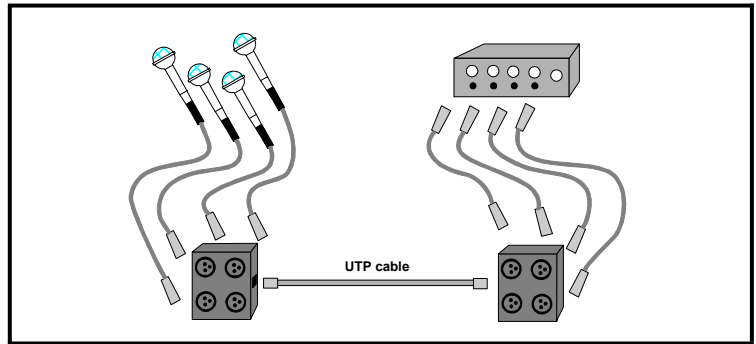

Features/Advantages	Description	Applications
<ul style="list-style-type: none"> <li>• Easily transported</li> <li>• Low cost</li> <li>• No ground loops</li> <li>• Add second unit to increase the number of channels</li> <li>• May be used for analog or digital audio</li> <li>• Supports 48V phantom power</li> <li>• Rugged, 'road-ready' construction</li> <li>• RoHS compliant</li> <li>• USA Made</li> <li>• 100% tested</li> </ul>	<p>The <b>ETS InstaSnake™ Series (SDS900 Series)</b> is a compact, lightweight, versatile passive group of components allowing you to run audio signals over a single run of CAT5, 5E or 6 cables. With a roll of wire, these compact units are easily transported and/or stored solving dozens of live and/or recording sound problems.</p> <p>The <b>InstaSnake™</b> is a passive unit, so you do not need power. The <b>InstaSnake™</b> accepts 'mic 'level, line level, analog or digital audio and supports phantom power when using shielded Cat5 or Cat6 cables.</p> <p>The basic units are a pair of passive units with bi-directional capability which can be input directly into analog or digital consoles. Designed to the highest professional standards the <b>InstaSnake™</b> has a wide, flat frequency response, low THD and residual noise. The <b>InstaSnake™</b> has been factory tested to 1900 feet over CAT5 using low Z dynamic microphones. Phantom power has been tested to 850 feet over <u>shielded*</u> cable. (*Phantom Power – <u>Shielded Cat5 or 6 cables are required</u> to pass phantom power.)</p> <p>The <b>SDS901</b> and <b>SDS902</b> with (4) 3.00 foot pigtailed lets you access the mixer without the need for additional 4 microphone cables.</p>	<ul style="list-style-type: none"> <li>• Live Sound</li> <li>• Recording Studios</li> <li>• TV &amp; Radio Broadcasts</li> <li>• Production/Post Production Houses</li> <li>• Foley/ADR Studios</li> <li>• Hotels</li> <li>• Convention Centers</li> <li>• Churches</li> <li>• Cruise Ships</li> <li>• Auditoriums/Stadiums</li> <li>• Home Studios</li> <li>• Remote &amp; News Trucks</li> <li>• Field Recording</li> </ul>

Specifications		Product Ordering Information	
Crosstalk @ 20KHz	-109 dB between Ch1 and Ch2 -103 dB between Ch1 and Ch3 -106 dB between Ch1 and Ch4 -106 dB between Ch2 and Ch3 -106 dB between Ch2 and Ch4 -109 dB between Ch3 and Ch4	SDS901 SDS902	(4) MXLR 3.00 ft pigtail to RJ45 jack, all pins (4)FXLR 3.00 ft. pigtail to RJ45 jack, all pins
Distance	UTP – 1900 ft. FTP or STP 850 ft – Phantom power only		
Connectors	Female or Male XLR 3.00' pigtail to Ethercon RJ45 jack		
Dimensions	69mm x 62mm (+ pigtail) x 36mm (L x W x H)		
Weight	0.60 Kg		

© Copyright 2005-2014 Energy Transformation Systems, Inc.  
 FatCat5 System panels and information outlets protected under US Patent Number 6,123,577. FatCat5™, FatCat5 System™, Chameleon Color Coding System™, Balanced Star™, Balanced Line™, Monoline™ and Precision Wave™, InstaSnake™, CineSnake™ are trademarks of Energy Transformation Systems. All other brand or product names are or may be trademarks of, and are used to identify the products or services of their respective owners.  
 Revised 7/21/14



**Energy Transformation Systems, Inc.**

43353 B Osgood Rd. Fremont, CA 94539  
 800-752-8208 510-656-2012 Fax 510-656-2026