Custom Theater Products *Audio Splitter Panels*

TYPICAL USE DIAGRAM
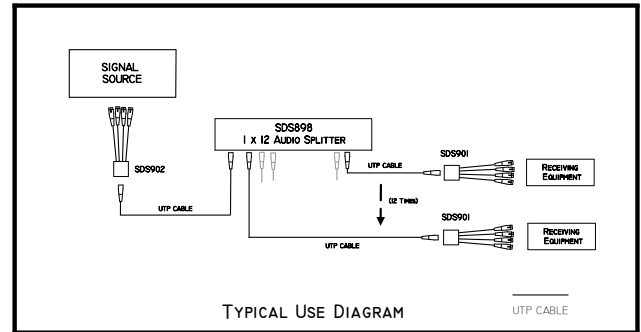
Features/Advantages	Description	Applications

• Split/combine (1) RJ45 jack into (12) RJ45 jacks
 	
• (4) FXLR to (8) RJ45 jacks; (2) FXLRs to (10) MXLRs and (8) FXLR to (4) RJ45 jacks
 	
• All connectors are high quality Neutrik® brand connectors
 	
• Passive device (unpowered)
 	
• Extensive runs over Cat5 or better cable, reducing weight and cost or utilize existing telecom wiring
 	
• Rugged metal enclosure
 	
• Made in USA
 	
• 100% tested
	The ETS SDS Audio Splitter Panels (or the SDS915, 1x3 stand-alone unit) are 1 RU high featuring etherCon RJ45 to etherCon RJ45 jack, XLR to etherCon RJ45 jacks and XLR to XLR connectors. Each individually balanced audio input splits into several outputs and share on a single connection cable. It is suitable for analog and digital audio signals. Phantom power is supported when using shielded Cat5 or better cables. No external power source is needed which gives greater reliability.
	  These Audio Splitter Panels and the SDS915 stand-alone units can be used in conjunction with the ETS InstaSnake SDS901, SDS902 and the Audio Matrix Hub (SDS899) The Audio Splitter Panels or the 1x3 stand-alone units offer a complete solution that optimizes nearly any professional audio installation.
	  The SDS Audio Splitter Panels are cost-effective and quickly and easily installed. Many configurations are available to meet your connectivity requirements.
		● Seasonal/regional theaters
		
		● Broadcast control rooms
		
		● Legitimate (Broadway) theaters
		
		● Touring productions
		
		● Worship centers
		
		● Educational institutions
		● Healthcare facilities
		
		● Point-of-Sale and in-store retail displays

*NOTE: Category 5e or better cable recommended. Other wiring may result in non-compliance with FCC rules and regulations.

Specifications		Product Ordering Information	
Signals: Input & Output	Balanced Audio	SDS898	1 x 12 Audio Splitter Panel, (1) etherCon RJ45 jack to (12) etherCon RJ45 jacks, 1 RU
Connectors	RJ45 jack, FXLR and MXLR	SDS912	4x8 Audio Splitter Panel, (4) FXLR to (8) etherCon RJ45 jacks, 1 RU
Media	Cat5 or better UTP cable is recommentded	SDS913	1x5 Audio Splitter Panel, 2 channels (2) FXLR to (10) MXLR, 1 RU
		SDS914	4x2 Audio Splitter Panel, 2 channels (8) FXLR to (4) etherCon RJ45 jacks, 1 RU
Dimensions	1 RU x 35mm deep x 19" wide 72mm x 110mm x 42mm (SDS915)	SDS915	1x3 Audio Splitter, (1) etherCon RJ45 jack to (3) etherCon jacks
Net Weight	0.50 kg, (0.32 Kg (SDS915)		

Energy Transformation Systems, Inc.
43353 B Osgood Rd. Fremont, CA 94539
www.etslan.com
800-752-8208   510-656-2012   Fax 510-656-2026

RoHS©