


PV920WP Series

Component Video Wall Plates

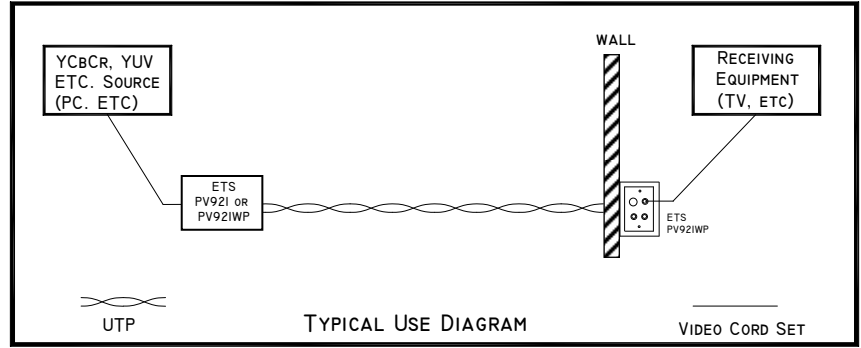

Features/Advantages	Description	Applications
<ul style="list-style-type: none"> • Decorator wall plates for a sleeker, cleaner professional installation • Easy installation with punch-down blocks • Ports are pre-labeled and easily identified • Send Component Video signals on UTP at distances of up to 600 feet (150 feet nominal using CAT3 cable) • Meets FCC Class A • Superior signal balancing, lower crosstalk, less ingress and ghosting • May utilize existing telecom wiring • Made in USA • 100% tested • Available in White or Ivory 	<p>The ETS PV920WP/PV921WP Component Video Wall Plate has been designed with a new flat circuit board and decorator wall plate giving neater, more professional installations by complementing existing wall plates. For ease of use all ports are pre-labeled for consistent signal labeling for applications utilizing component video signals.</p> <p>Components video formats include RGB, YUV, YIQ and YCbCr. The PV920WP/PV921WP Wall Plate Balun are functionally identical to the PV890WP, but may be labeled for use with your application as required (YCbCr shown above). Due to custom labeling requirements, additional lead times may apply for these products.</p> <p>YCbCr component video is a recent addition to consumer equipment, found on some DVD players, high-end televisions and home theater equipment. Professional uses include cameras and VTRs based upon any of the above standards.</p>	<ul style="list-style-type: none"> • DVD/Home Theater • Broadcast Studios • Production and Post-production Facilities • Video Projection Systems • Conference Rooms • Schools • Healthcare Facilities

Specifications	Product Ordering Information
<p>Bandwidth Flat to 60 MHz, each channel</p> <p>Crosstalk >50dB</p> <p>Connectors RCA jacks or FBNC to 110 punch down type</p> <p>Distance 500 feet</p> <p>Media Category 3 or better Category 5 or better recommended</p> <p>Emission Meets FCC Class A</p> <p>Dimensions 79mm x 123mm x 40mm</p> <p>Net Weight 0.08 kg (0.11 kg for PV920WP)</p>	<p>PV920WP-X Component Video, (3) FBNC to 110 punch-down</p> <p>PV921WP-X Component Video, (3) RCA jacks to 110 punch-down</p> <p>PV926WP-X CV+IR (3) RCA jacks + (1) 3.5mm jack to 110 punch-down</p> <p>NOTE: FOR WHITE, X= WH FOR IVORY, X= IV</p>

© Copyright 2005-2011 Energy Transformation Systems, Inc.
 FatCat5 System panels and information outlets protected under US Patent Number 6,123,577. FatCat5™, FatCat5 System™, Chameleon Color Coding System™, Balanced Star™, Balanced Line™, Monoline™ and Precision Wave™, InstaSnake™, CineSnake™ are trademarks of Energy Transformation Systems. All other brand or product names are or may be trademarks of, and are used to identify the products or services of their respective owners.

Revised 10/13/2011



Energy Transformation Systems, Inc.
 43353 B Osgood Road, Fremont, CA 94539
 www.etslan.com
 800-752-8208 510-656-2012 Fax 510-656-2026