


# AV900WP Series

# Baseband Video/Stereo Audio Wall Plates

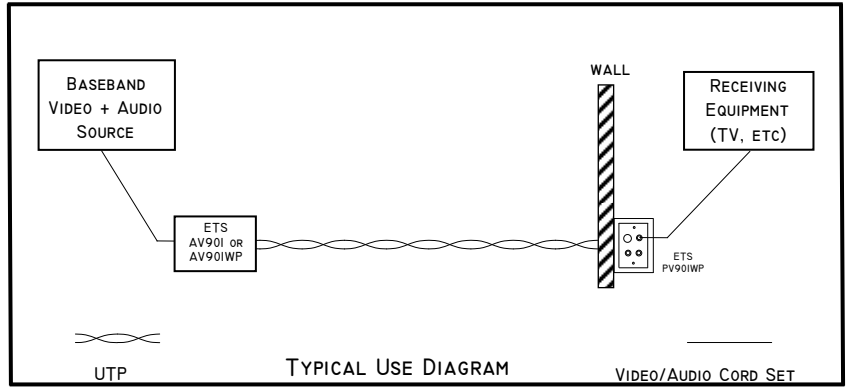

Features/Advantages	Description	Applications
<ul style="list-style-type: none"> <li>• Decorator balun wall plates for a sleeker, cleaner professional installation</li> <li>• Easy installation with punch down blocks</li> <li>• Ports are pre-labeled and easily identified</li> <li>• 1 or 2 baseband video channel and 2 line level audio channels on one run of Category 5 UTP</li> <li>• Use for point to point replacement of coax and shielded cables</li> <li>• Available in white or ivory</li> <li>• Made in USA 100% tested</li> </ul>	<p>The <b>ETS AV900WP, AV901WP and AV906WP Baseband Video/Stereo Wall Plates</b> which are utilized for point-to-point replacement of coaxial (video) and shielded (high impedance audio) cables with UTP wiring, Category 5 or better.</p> <p>The <b>AV901WP</b> (with 3 RCA jacks for all inputs) is designed for installations that have a need for separate audio channels. For example, some VCRs and Video Cameras have video plus stereo outputs available on three RCA jacks. The <b>AV901WP</b> can run these signals using three of the four pairs in standard UTP cable.</p> <p><b>AV906WP</b> (with 4 RCA jacks for all inputs) allows you to send two channels each of baseband video and audio in any direction desired. This capability yields, for instance, a bi-directional video + mono audio link, or many other configurations.</p> <p>You get the same high quality baluns with the addition of an enhanced appearance of wall plates, giving you a neat, professional installation.</p>	<ul style="list-style-type: none"> <li>• Schools</li> <li>• Classrooms</li> <li>• Auditoriums</li> <li>• Home Theater</li> <li>• Security &amp; Surveillance</li> <li>• Satellite TV Facilities</li> <li>• Personal Computers</li> </ul>

Specifications		Product Ordering Information	
Bandwidth	Flat to 60 MHz (video) 10Hz to 20kHz (audio)	AV900WP-X	Video + Stereo Audio (1) FBNC + (2) RCA jacks to 110 punch-down
Connectors	FBNC or RCA jack (video)+2 RCA jacks (audio) to 110 punch down type	AV901WP-X	Video + Stereo Audio, (3) RCA jack to 110 punch-down
Common Mode Rejection	>50dB (video)	AV906WP-X	Dual Video + Dual Audio, (4) RCA jack to 110 punch-down
Impedance	600:600 (audio)	B/W 2500 ft	
Isolation	500 V (audio, per channel)	<b>NOTE:</b> FOR WHITE, X= WH	
Distance	Audio – 1000 ft; Video – Color 1200 ft,	FOR IVORY, X= IV	
Dimensions	79mm x 123mm x 40mm		
Net Weight	0.08 kg		

© Copyright 2004-2011 Energy Transformation Systems, Inc.  
 FatCat5 System panels and information outlets protected under US Patent Number 6,123,577. FatCat5™, FatCat5 System™, Chameleon Color Coding System™, Balanced Star™, Balanced Line™, Monoline™ and Precision Wave™, InstaSnake™, CineSnake™ are trademarks of Energy Transformation Systems. All other brand or product names are or may be trademarks of, and are used to identify the products or services of their respective owners.  
 Revised 11/01/2011



**Energy Transformation Systems, Inc.**  
 43353 B Osgood Road, Fremont, CA 94539  
 www.etslan.com  
 800-752-8208 510-656-2012 Fax 510-656-2026



**AV900WP Series**

**Baseband Video/Stereo Audio Wall Plates**



***Energy Transformation Systems, Inc.***  
43353 B Osgood Road, Fremont, CA 94539  
[www.etslan.com](http://www.etslan.com)  
800-752-8208 510-656-2012 Fax 510-656-2026