


# SDS Audio System



## AES/EBU Digital Audio Splitter Panel

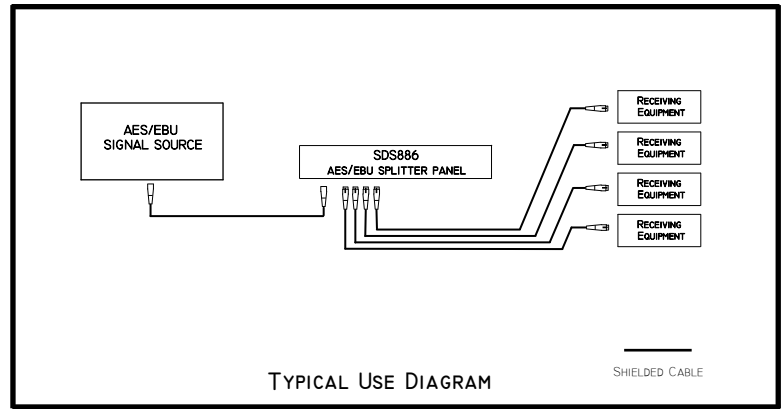

Features/Advantages	Description	Applications
<ul style="list-style-type: none"> <li>• Device is to be used for splitting AES/EBU digital audio signals</li> <li>• Eliminates the need for a distribution amplifier in many applications</li> <li>• Offers superb impedance matching</li> <li>• Passive unit: Requires no power source for operation</li> <li>• All connectors are high-quality Neutrik™ brand</li> <li>• Easily rack-mounts in a 19" 1U rack space</li> <li>• Rugged powder-coated metal chassis</li> <li>• Made in USA</li> <li>• 100% tested</li> </ul>	<p>The <b>ETS SDS886</b> is a 2-Channel "(1) IN – (4) OUT" <b>Digital Audio Splitter Panel</b>. This rack-mounted product has been designed and manufactured expressly for the digital audio market.</p> <p>Note: this device is intended only for balanced 110-ohm signals.</p> <p>The passive [and thus highly reliable] unit accommodates signal levels up to 10V. In addition, the versatile SDS886 maintains proper impedance so the remarkably innovative digital audio splitter need not be symmetrically applied.</p> <p>In many applications, the SDS886 completely eliminates the need for a distribution amplifier, not only significantly lowering costs, but reducing overall system complexity, as well.</p>	<ul style="list-style-type: none"> <li>• Recording Studios</li> <li>• Network Cable and Broadcast Control Rooms</li> <li>• Mobile audio recording studios</li> <li>• On-site concert recording</li> <li>• Legitimate "Broadway" Theater</li> <li>• Seasonal performing venues</li> <li>• Worship centers</li> <li>• Educational facilities</li> <li>• Healthcare institutions</li> </ul>

Specifications		Product Ordering Information	
Bandwidth	200 KHz to 10 MHz	SDS886	AES/EBU Splitter Panel, 2 channel 1in 4out, 1 RU
Connectors	(1) F-XLR to (4) M-XLR per channel		
Impedance	110 ohm		
Impedance match	+/- 2%		
Insertion Loss	<0.10 dB		
Output to Output			
Isolation	40 dB		
Maximum signal	10 Vp-p		
Dimension	1 RU x 35mm DEEP		
Net Weight	0.15 Kg		

© Copyright 2011- 2013 Energy Transformation Systems, Inc. FatCat5 System panels and information outlets protected under US Patent Number 6,123,577. FatCat5™, FatCat5 System™, Chameleon Color Coding System™, Balanced Star™, Balanced Line™, Monoline™ and Precision Wave™, InstaSnake™, CineSnake™ are trademarks of Energy Transformation Systems. All other brand or product names are or may be trademarks of, and are used to identify the products or services of their respective owners. Revised 04/03/2013



**Energy Transformation Systems, Inc.**

43353 B Osgood Rd. Fremont, CA 94539

www.etslan.com

800-752-8208 510-656-2012 Fax 510-656-2026

